

# ZOLAR™ Vega 30C

## Product Specifications

LED Type	5-color, Full Spectrum
White Light	2,000K to 20,000K continuously variable correlated color temperature
Colored Light	Full RGBAW Color Gamut with Hue and Saturation Control
Light Diffusion System	Reflective Membrane + ZOLAR Stylist
Color Rendition	CRI: Ra ≥ 97 (R9 & R12 up to 97), TLCI ≥ 98
Spectral Similarity Index	SSI up to 90
Light Aperture	240mm x 240mm (9.45" x 9.45")
Dimming	0 ~ 100% continuous (Main Unit Controller 0.1% precision), different dimming curves, smooth dimming down to zero without color shift
Color Temperature Tolerance	+/- 100 K (nominal)
Tilt Angle	± 360°
Handling	Aluminium Yoke, Tilt Lock Clamping Lever, Pole Operation for pan & tilt
Mounting	16 mm / 28 mm Combo Pin (Baby 5/8" / Junior 1-1/8" Combo Pin) / 28 mm Spigot (Junior Pin)
Multi Light Sync	ZolarLink™ - Multi Light Sync Protocol, up to 16 groups with 60 slave units maximum per group (wireless); up to 32 units maximum per group (cable)
Control	Main Unit Controller
Remote Controller	Remote Controller, cable length 5m (16.4 ft)
Wireless Control	Wi-Fi, Bluetooth, ZOLAR™ Mobile App, Art-Net 4 & sACN protocol
Remote Device Management (RDM)	DMX Setup, Standard RDM commands
Ethernet	Ethernet connectivity, Art-Net 4 & sACN protocol
DMX	5-Pin DMX In, 5-Pin DMX Out
Power Input	48V, 5.2A DC
Power Connection	Male 3-Pin XLR - 15A (Pin 1: Negative / Pin 2: Positive)
Battery Input	Dual V- Mount, 12.8 ~ 16.8V (180Wh min.)
PSU	110 ~ 240V, AC loop out, powerCON
Power Consumption	250 W maximum
Cooling System	Low Noise Fan mode (Auto, High, Mid, Low)
Ambient Temperature Operation	-20°C ~ +45°C (-4°F ~ +113°F)
Estimated LED Lifetime	50,000 hours (L70)
Estimated Color Shift Over Lifetime (CCT)	± 5%
Weight (Main Unit) <small>- Main Unit + ZOLAR Stylist W</small>	3.67 kg / 8.09 lb
Weight (Main Unit) <small>- Main Unit + ZOLAR Stylist W + Yoke</small>	4.53 kg / 9.99 lb
Weight (Full Package) <small>- Main Unit + ZOLAR Stylist W + Yoke + PSU + Remote Controller + Packing Materials</small>	11.58 kg / 25.53 lb
Measurements (HxWxL) <small>- Main Unit + Yoke</small>	475 x 420 x 130 mm / 18.70 x 16.54 x 5.12 inch
Measurements (HxWxL) <small>- Full Package</small>	580 x 540 x 330 mm / 22.84 x 21.26 x 12.99 inch
Certifications	CE, FCC, UKCA, SRRC



# ZOLAR™

# The Sun is the limit

ZOLAR™ professional LED lighting system is developed by Shenzhen ImagineVision Technology Limited, the same successful team that created Z CAM Cinema Cameras. ZOLAR™ products are developed with profound color science knowledge, leading image processing algorithms, as well as camera lens and sensor calibration expertise. Delivering high fidelity color reproduction and excellent color rendition with performances very close to natural daylight.

Our in-house developed “Self Adaptive Spectral Nonlinear Dynamic Illuminance Calibration System” eliminates the inconsistent LED performance issues. In addition, our revolutionary solution allows a mixture of ZOLAR™ light series to be used simultaneously without any visible color deviation (color matching mode will be added to other ZOLAR™ series).


ZOLAR™ Vega is a 5-color LED light panel series targeting professional video productions. Its wide CCT range, excellent soft light performance and high fidelity color reproduction has set a new benchmark for the industry. Designed with 5-color full spectrum LEDs and RGBAW algorithm to deliver continuous light spectrum across full CCT range with exceptionally high CRI & TLCI scores, particularly in R9, R12, R13 & R15. No compromise.

Spectral Similarity Index (SSI) is developed by The Academy of Motion Picture Arts and Sciences to evaluate the fidelity of color reproduction particularly for LED light, from a single chip CMOS digital camera point of view. It quantitatively compares the spectrum of the test light with that of a desired reference light source, expressing the similarity as a single number on a scale up to 100. High values indicate a high likelihood of high fidelity color reproduction by most cameras. SSI of ZOLAR™ Vega is close to or exceeds 90, across full CCT range (2,000K ~ 20,000K), a leading standard in the industry.

Higher score implies higher fidelity color reproduction, particularly the skin tone. This is exactly why these scores exist.

### ZOLAR™ Vega 30C - Product Highlights

- CRI: Ra ≥ 97 (R9 & R12 up to 97), TLCI ≥ 98;
- Spectral Similarity Index SSI up to 90;
- Full RGBAW Color Gamut
- CCT range: 2,000K ~ 20,000K
- DMX, Art-Net 4 & sACN + powerCON
- ZOLAR Stylist precision directional super light transmissible panel: control beam angle, light diffusion, no color shift;
- Multi Light Sync - ZolarLink (wireless / cable), rapid auto sync grouping;
- Built in Light Effect (synchronized) for different scene applications;
- Bluetooth + Wi-Fi mixed control: Remote Controller, mobile app (iOS & Android).

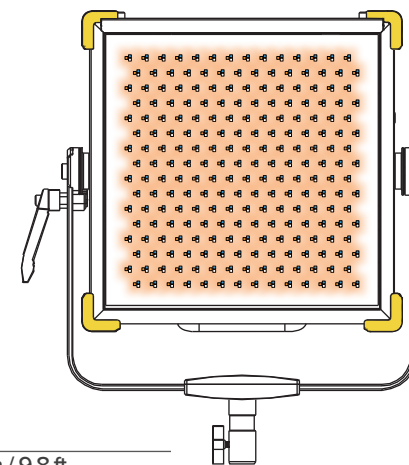

### Photometric data \*\*

Beam Angle: Side A 90°, Side B 127°

		1 m / 3.3 ft			3 m / 9.8 ft		
ZOLAR™ Vega 30C	Beam Angle	CCT: 3,200K	4,000K	5,600K	3,200K	4,000K	5,600K
w/ ZOLAR™ Stylist W*	90°	7,107 lx 661 fc	7,079 lx 658 fc	7,069 lx 657 fc	881 lx 82 fc	876 lx 81 fc	873 lx 81 fc

\* Side A facing outward.

\*\* All measured values are average numbers. There is a certain variance in different products.

Warranty Period: 12 months

Disclaimer:

All product features and technical specifications stated are subject to the sole interpretation and explanation of Shenzhen ImagineVision Technology Limited, and subject to change without notice.

Copyright © 2022 Shenzhen ImagineVision Technology Ltd. All Rights Reserved

Shenzhen ImagineVision Technology Limited  
1A, Block F5, TCL International E City,  
1001 Zhong Shan Park Road,  
Nan Shan, Shenzhen, China  
Post Code: 518055  
www.z-cam.com/zolar